
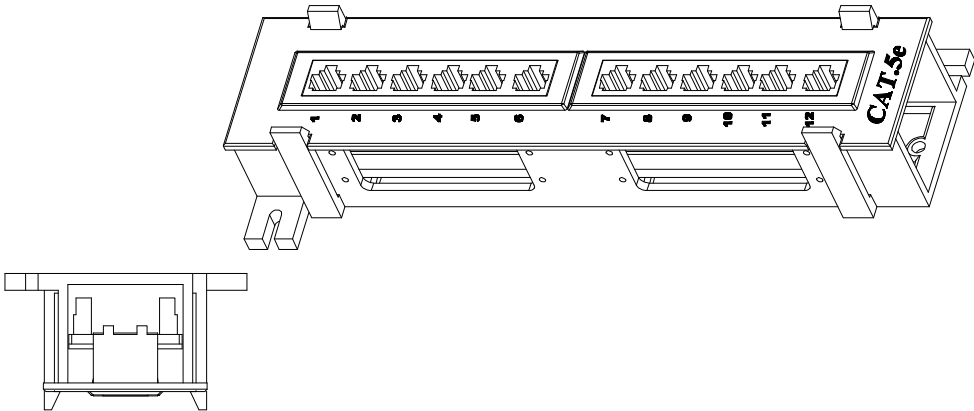
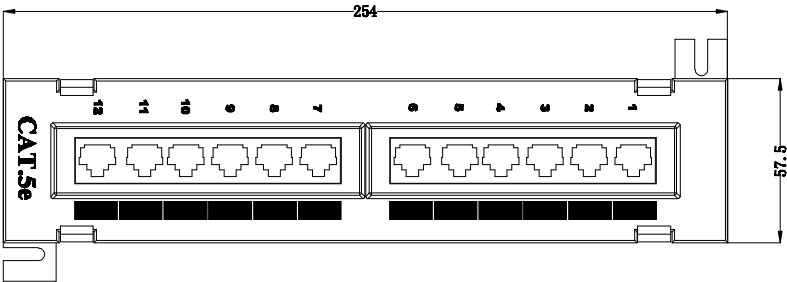
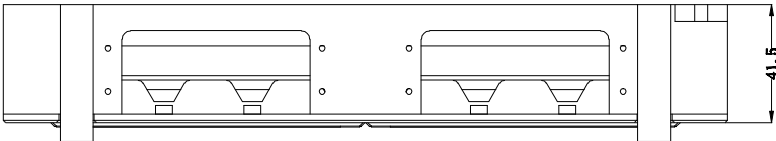


NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD


REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

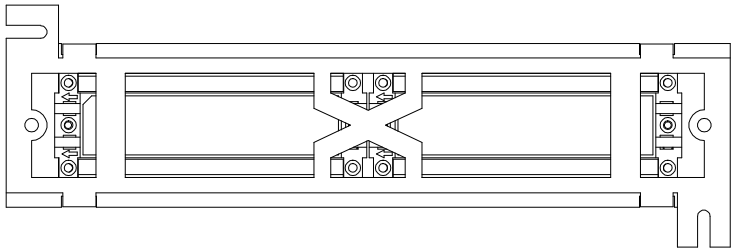

SPECIFICATION

- 1. Operation Temperature : -10° C to 60° C.
- 2. Insertion Force: 900gms for 8 contacts.
- 3. Retention Strength : 7.7 kgs between jack and plug.
- 4. Durability : 750 Cycles contact resistance test check every 100 Cycles.Insertion cycles at 20 cycles/minute max.

PIN/PAIR ASSIGNMENTS

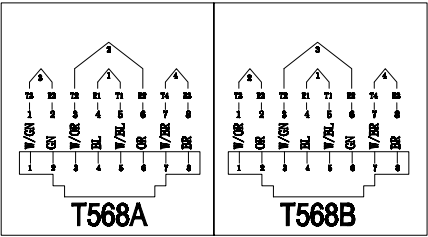

④	P. C. Board	FR4, 1.6mm Double side	2	Pcs
③	110 Connector—Body	PC UL94V-0	12	Pcs
②	RJ45 Jack—Body	PC UL94V-0 rated	12	Pcs
①	Patch Panel	Case, metal 1U	1	Pcs
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT



COMMODITY
CABLES, INC.
www.commoditycables.com

DRAWN BY	DATE: 2012/08/17	DESCRIPTION: Cat. 5e 180° Unshielded Mini Vertical 12Port Panel, 110 type	
CHECKED BY	SHEET 1 of 1	ITEM NO. 5PPMINI	
APPROVED BY	SCALE 1:1	REV. 00	UNIT: mm 