



NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

REVISION INFORMATION

Rev.	Rev.Date	Modified By	Brief Description

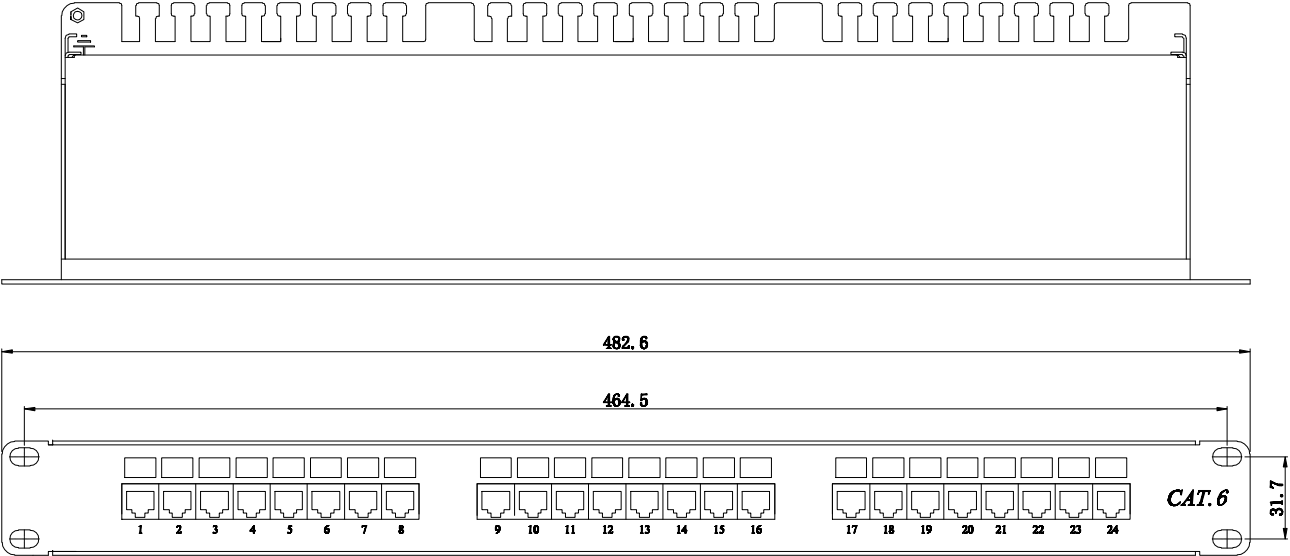


SPECIFICAION

1. Operation Temperature : -10 °C to 60° C.
2. Insertion Force: 900gms for 8 contacts.
3. Retention Strength : 7.7 kgs between jack and plug.
4. Durability : 750 Cycles contact resistance test check every 100 Cycles.Insertion cycles at 20 cycles/minute max.

ELECTRICAL

- 1.Current rating:1.5 Amps
- 2.Insulation resistance:500 MOhm
- 3.Contact resistance:20 mOhm
- 4.DC resistanc:0.1 Ohm
- 5.Dielectric withstanding voltage:1000 V

PIN/PAIR ASSIGNMENTS

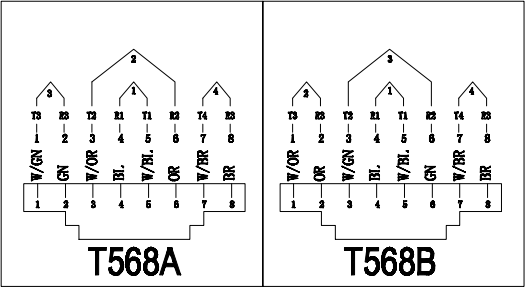

④	110 Connector---Body	PC UL94V-0	24	Pcs
③	P.C. Board	FR4, 1.6mm Double side	3	Pcs
②	RJ45 Jack---Body	PC UL94V-0 rated. Black color	3	Pcs
①	Patch Panel	SBOC, metal 1U	1	Pcs
NO.	PART NAME	SPECIFICATION DESCRIPTION	QT' Y	UNIT



DRAWN BY	DATE: 2012/08/20	DESCRIPTION: Cat.6 90° Shielded 8/24 Port Panel
CHECKED BY	SHEET 1of1	ITEM NO. 6PPS24
APPROVED BY	SCALE 1:1	REV. 00 UNIT:mm